


XH-80*50 split core CT

一、datasheet:

- 1、rated V: 0.66KV;
- 2、insulation V: 2KV;
- 3、rated H: 50HZ or 60HZ;
- 4、environment temperature: -15℃~+40℃;
- 5、Flame retardant properties: UL94-V0;
- 6、certification: CE、ETL

二、size:

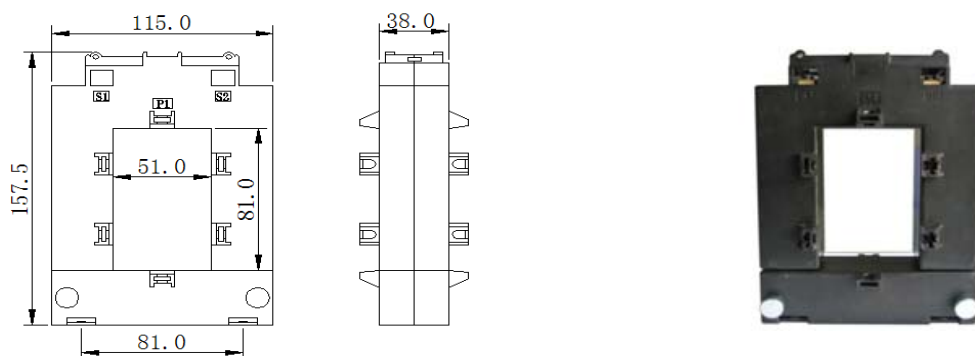

三、models:

1、output:5A

Model	Rated input (A)	Class	burden (VA)	Frequency	Isolation
XH-80*50	250/5	1	1.5	50/60Hz	≤3KV
	300/5	1	1.5		
	400/5	0.5	1.5		
	500/5	0.5	2.5		
	600/5	0.5	2.5		
	750/5	0.5	2.5		
	800/5	0.5	2.5		
	1000/5	0.5	5		

2、output:1A

Model	Rated input (A)	Class	burden (VA)	Frequency	Isolation
XH-80*50	250/1	1	1.5	50/60Hz	≤3KV
	300/1	1	1.5		
	400/1	0.5	1.5		
	500/1	0.5	2.5		
	600/1	0.5	2.5		
	750/1	0.5	2.5		
	800/1	0.5	2.5		
	1000/1	0.5	5		

